

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number  
**WO 2004/043105 A1**

(51) International Patent Classification: **H04Q 7/38,**  
**H04L 12/28**

[FI/FI]; Lohjantie 13, FIN-03100 Nummela (FI). BODA,  
Peter [IIU/US]; 200 Technology Square, Room 608,  
Cambridge, MA 02139 (US).

(21) International Application Number:

PCT/FI2003/000816

(74) Agent: **TOGNETTY, Virpi, Maria**; Page White & Farrer,  
Runeberginkatu 5, 10th Floor, FIN-00100 Helsinki (FI).

(22) International Filing Date:

4 November 2003 (04.11.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), DE (utility model), DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0225888.7 6 November 2002 (06.11.2002) GB

(71) Applicant (*for all designated States except US*): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **REUHKAIA, Erkki** [FI/FI]; Ylisrinne 1 as 27, FIN-02210 Espoo (FI). **RAUTIOIA, Markku** [FI/FI]; Kaonpääkatu 47, FIN-33820 Tampere (FI). **KULHA, Jukka** [FI/FI]; Ansaritie 6 A 2, FIN-00350 Helsinki (FI). **NIKANDER, Jukka**

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

[Continued on next page]

(54) Title: PROVIDING ROUTING INFORMATION IN A COMMUNICATION SYSTEM

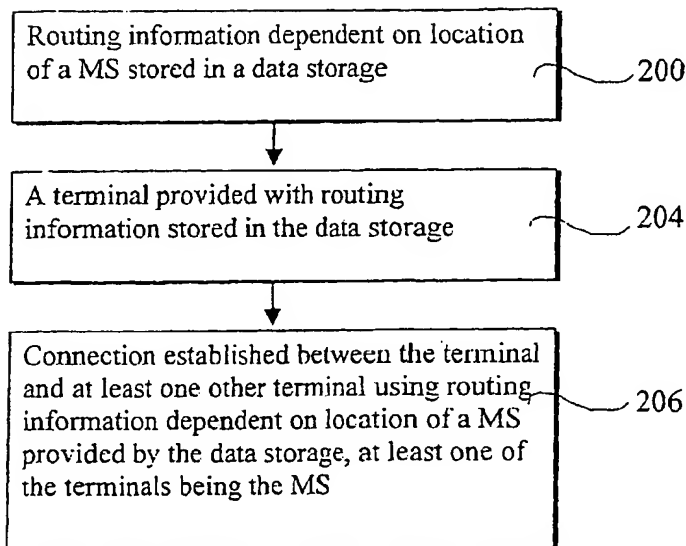

(57) Abstract: A method for providing routing information for establishing connections over a communication system comprising a plurality of communication networks is described. The method comprises storing location dependent routing information in a data storage, providing a terminal with location dependent routing information stored in the data storage and establishing connection between the terminal and at least one other terminal using location dependent routing information provided by the data storage. At least one of the terminals is a mobile terminal and information for routing the connection between the terminals is selected based on the location of the at least one mobile terminal.



SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

## PROVIDING ROUTING INFORMATION IN A COMMUNICATION SYSTEM

### FIELD OF INVENTION

The present invention relates to the field of mobile telecommunications, and, more specifically, to providing routing information for establishing connections  
5 involving at least one mobile station over a communication system.

### BACKGROUND TO INVENTION

Mobile telecommunications systems providing mobility for the users of mobile user equipment (UE) referenced to as mobile stations (MS) are known. A typical example of a mobile station is the mobile telephone. However, other  
10 types of mobile stations than mobile telephones are also known, these including devices such as mobile personal data assistants (PDA) or portable or otherwise mobile computers (e.g. laptop PCs) provided with means for wireless communication.

A feature of the mobile telecommunications systems is that these systems  
15 enable the users thereof to make and receive calls and otherwise use their mobile stations also in visited networks in addition to enabling mobility in the home network of the mobile subscriber.

Use of the resources of network other than the home network is referenced to as roaming. The roamed network will be referenced to in the following as a  
20 visited network. The visited network is typically a network run by another operator. The network can be operated either abroad or in the same country as where the home network operates.

A typical example of roaming is when a subscriber to a network operated in a first country uses his/her mobile station via a network operated in another  
25 country when visiting said other country. This type of roaming is known as international roaming. However, as mentioned above, the user may also roam into a network operated in the home country of the user.

The costs of roaming, and especially international roaming to mobile users can be relatively high compared to home network mobile communications or Public  
30 Switched Telephone Network (PSTN) communications via, for example, fixed telephone lines from a foreign country. A reason for this is that the mobile subscriber may be subjected to costs such as international call charges, specific roaming charges and other costs not appearing in the connections in the home network. The cost factor may be especially relevant for organisations

such as big corporations, international communities and similar bodies responsible for paying the phone bills of a substantial number of travellers.

Roaming costs are present in the current billing mechanism for mobile users. Although it could be possible to rely more on fixed line connections when  
5 roaming this would mean that the advantage of mobility is lost.

A number of mobile telecommunications operators offer special International Direct Dial (IDD) services for pre-paid users. Whilst an IDD service may be used for reducing the costs of outgoing calls abroad such solutions are not particularly user-friendly. The user-unfriendliness may be increased by the fact  
10 that they typically operate on an Interactive Voice Response (IVR) platform. The users may find it frustrating to dial in to an IVR platform, authenticate themselves with a Personal Identification Number (PIN) code or similar means and then eventually key in the number they want to reach. Moreover, this approach does not provide a solution for receiving calls whilst abroad without  
15 becoming liable for the roaming costs. In this latter case, the international roaming costs are payable, since the home number of the roaming user is seen as a foreign number from the actual country the roaming user is in.

Furthermore, users, in particular mobile users, are often accustomed to name-based dialling using for example private phonebooks stored in the user's  
20 telephone. Typically, only most often used telephone numbers of individual persons are stored in such a private phonebook. Alternative numbers, such as numbers exploiting company's private network or universal access numbers, are seldom stored in the private phonebooks and, consequently, seldom used. This issue is present while roaming, but also when the terminal is in the home  
25 network.

## SUMMARY OF INVENTION

Embodiments of the present invention aim to address one or several of the above problems. Certain embodiments aim to enable mobile users to use alternative numbers easily. For example, when roaming or calling abroad from  
30 the home network the embodiments may allow calls at a lower cost than in the prior art. In certain other embodiments a call can be made to a roaming mobile station using one of alternative ways to route the call to the mobile user. This may be used to reduce the costs for both the calling user and the called roaming mobile user.

According to one aspect of the present invention, there is provided a method for providing routing information for establishing connections over a communication system comprising a plurality of communication networks, the method comprising storing location dependent routing information in a data storage, providing a terminal with location dependent routing information stored in the data storage and establishing connection between the terminal and at least one other terminal using location dependent routing information provided by the data storage, wherein at least one of the terminals is a mobile terminal and information for routing the connection between the terminals is selected based on the location of the at least one mobile terminal.

According to another aspect of the present invention there is provided an arrangement in a communication system comprising a plurality of communication networks for providing a terminal with information for establishing a connection to at least one other terminal, the arrangement comprising a data storage for storing location dependent routing information, means for transferring location dependent information from the data storage to the terminal and, in the terminal, means for establishing a connection between the terminal and at least one other terminal using location dependent routing information provided by the data storage, wherein at least one of the terminals is a mobile terminal and information for routing the connection between the terminals is selected based on the location of the at least one mobile terminal.

According to another aspect of the present invention there is provided a computer program, a mobile terminal and a routing server adapted to the embodiments.

The embodiments may provide a calling user with advantages of large telephone diaries and wide dialling options, which may be updated efficiently. The telephone diaries and dialling options the user is familiar with in the home network may be provided also in a visited network when roaming. The embodiments of the invention may provide means for cost-effective roaming for mobile users. Similar cost savings may be achieved also in the home network. For example, optimised and updated routing information may be used when establishing a connection abroad from the home network.

The operation may be made transparent for the user. An automatic updating of the routing information and an automatic call routing provided in accordance with certain embodiments may be used to ensure that the users will use the system, thus ensuring that benefits offered by the system are obtained. The

automatic updating of the routing information and the automatic routing preferably occur without any explicit effort from the user. The embodiments of the invention may ensure that an optimisation of call routing may be affected.

### BRIEF DESCRIPTION OF DRAWINGS

- 5 Figure 1 is a schematic view of a system wherein the invention may be embodied;

Figure 2 is a flowchart showing steps for an embodiment of the invention;

Figure 3 shows a schematic view of a mobile terminal.

- 10 Figures 4 and 5 are schematic views of systems for routing a connection between a mobile station roaming in a network and a terminal in a different network, in accordance with certain embodiments of the invention;

Figure 6 is a flowchart showing steps for a further embodiment of the invention;

Figure 7 is a flowchart showing steps for a further embodiment of the invention; and

- 15 Figure 8 is a flowchart showing steps for a further embodiment of the invention.

### A SPECIFIC DESCRIPTION OF PREFERRED EMBODIMENTS

- Figure 1 shows a schematic system for providing connection between a mobile terminal 12 and another terminal 16 in a communication system 100. The communication system 100 may comprise a network provided by an operator or more than one networks provided by more than one operators. A data storage 102 is also provided for storing location dependent information. The data storage 102 may be connected to the communication system 100 in various ways, as will be explained in the following.

- 25 In accordance with the embodiments, a method for providing routing information for establishing connections over a communication system comprising a plurality of communication networks is provided. The flowchart of Figure 2 illustrates an embodiment. In step 200, location dependent routing information is stored in a data storage. In step 202, a terminal is provided with location dependent routing information stored in the data storage. In step 204, connection is established between the terminal and at least one other terminal using location dependent routing information provided by the data storage. In
- 30

the embodiments, at least one of the terminals is a mobile terminal and information for routing the connection between the terminals is selected based on the location of the at least one mobile terminal.

5 The connection establishment can be initiated by a mobile terminal or by any other terminal connected to the communication system.

Figure 3 shows a simplified structure of a mobile terminal 12, also called a mobile station. One skilled in the art is familiar with the features and operation of a typical mobile terminal. Thus, it is sufficient to note that the user may use a mobile terminal for tasks such as for making and receiving phone calls, for  
10 receiving and sending data from and to the network and for experiencing multimedia content or otherwise using multimedia services. A mobile terminal may include an antenna 302 for wirelessly receiving and transmitting signals from and to base stations of the mobile communication network. A mobile terminal may also be provided with a display 304 for displaying images and  
15 other graphical information for the user of the mobile terminal. Camera means may be provided for capturing still or video images. Speaker means are also typically provided. The operation of a mobile terminal may be controlled by means of an appropriate user interface such as control buttons 306, voice commands and so on. Furthermore, a mobile terminal is provided with a  
20 processing means 308 and a memory means 310.

The mobile station 12 further comprises input means for input of location dependent routing information, for example for receiving routing information from the network. Furthermore, the mobile station 12 comprises connection establishment means to be able to initiate an establishment of a connection.

25 Among other functions, the processing means 308 may be adapted to process information associated with the location of the mobile. The processing means 308 may comprise means for receiving an indication from the network the mobile station enters into. The processing means 308 may also comprise means determining the location from the mobile station, such as using a  
30 satellite positioning system or the like. Furthermore, the processing means may be configured to select routing information for connection establishment based on the location of the mobile terminal.

Among other functions, the memory means 310 may be adapted to store routing information and to select routing information for connection  
35 establishment.

The data storage 102 may be included in a network entity managed by the operator or another party. The data storage 102 may also be included in the mobile terminal 12. Different implementation possibilities will be described in the following description. The data storage 102 is configured to provide  
5 location dependent routing information for users of the network. In the following examples the routing information associates with calls to and from the mobile station 12. This location dependent routing information may then be used for establishing connections over the communication system comprising one or more communication networks such that the routing is based on the location of  
10 the mobile station 12. There are various ways of implementing this, and some of the possibilities will be described by a ways of example below.

The routing information may be associated with individuals who can be contacted via a terminal connected to the communication system. These individuals may be selected by the user of the mobile station from a set of  
15 routing information, for example as a personal dialling list of the user, see for example the list 22 appearing in Figure 5. The individuals may also be selected from another set of routing information, for example as a company sub-list of a group of persons working together. Naturally, any other appropriate way of grouping the individuals may be used.

20 According to an embodiment, the mobile terminal 12 is provided with at least two, preferably a plurality of alternative sets of routing information stored in the data storage 102 in the memory means 310 of the mobile terminal 12. The mobile terminal 12 may then itself decide which set of routing information to use based on the location thereof. For example, the mobile terminal 12 may  
25 store a plurality of alternative sets of routing information provided by a corporate directory phonebook. One set of routing information is for use when in the home network and other sets of routing information are for use when in a respective visited network.

According to another embodiment, the mobile terminal 12 may carry out a  
30 predefined action to update the routing information stored in the data storage 102 in the memory means 310 of the mobile terminal. In such an embodiment, the data storage may comprise a basic set of routing information which may be converted by the mobile terminal to another set of routing information based on additional routing information received by the mobile terminal.

35 Another example of routing information may include local call-in numbers and other parameters for performing so called two-stage dialling. Routing



information may be null for a country or operator network for which no specific routing information, such as cost-efficient alternatives, are available.

5 The mobile station 12 may automatically update the routing information or select appropriate set of routing information. This may be done in response to an event, such as predetermined change in location of the mobile terminal, connection set-up by the mobile terminal, an request for update, receipt of information from a subscriber information database of the home network of the mobile terminal, change in the routing information associated with an individual mobile terminal.

10 A specific example of the event may be detection that the operator of the network is different from the network the mobile station subscribes to. For example, whenever the terminal notifies that current network is changed, it may check if there is specific contact database or set of routing information for the current country. If there is, that contact database or set of routing  
15 information is set as active contact database or active set of routing information. Otherwise the international or other default contact database or set of routing information is set as the active contact database or active set of routing information.

20 The mobile station can be made aware of the network into which it has roamed in various manners. The mobile stations may detect the change in the operator e.g. based on the operator indicator received from the base station during the network registration process. Other possible identities are cell ID, or another identity associated with a base station of the communication system. Another possibility is that the mobile station itself determines information regarding the  
25 location thereof. Such a location information may also be provided e.g. by the so called location information services (LCS) associated with the mobile network, or by a satellite based positioning system, such as the GPS (Global Positioning System).

30 According to another embodiment, location information may include additional status parameters related to at least one mobile terminal. Such parameters may include presence information in the form of a dynamic profile of the user, visible to other and used to represent oneself, sahre information and control services. Furthermore, the parameters may include being within range of supported alternative network that uses wireless local area network (WLAN)  
35 technology, personal area networking (PAN) technology such as Bluetooth, or other parameters related to context awareness.

The embodiments may be advantageous, for example, in a distributed calling mechanism that may reduce roaming costs in case of mobile users belonging to a certain group, such as employees of a company. Such a mechanism is discussed in more detail in the following with reference to embodiments  
5 wherein a roaming mobile station may initiate a call to or receive a call from other party by means of location dependent routing information provided by the routing server 20.

A reference now is made to Figures 4 and 5 showing two examples of communications systems wherein the invention may be embodied. The  
10 exemplifying communication systems are shown to comprise different communication networks 1, 8, 10, 11. User equipments or terminals connected to respective networks and enabling communication between the users thereof are also shown. More particularly, mobile terminals or stations 2, 12 and a fixed line terminals 6, 16 are shown.

15 In the embodiments of Figures 4 and 5, the mobile station 2 subscribes to the first mobile communication network 1. The mobile station 12 subscribes a network other than the network 11. Thus the first mobile communication network 1 is referenced to in the following as the home network or the home communication system for the mobile station 2. The mobile station 12 is shown  
20 to be roaming the second mobile communication network 11. The second mobile communication network 11 will thus be referenced to in the following as the visited network or the visited mobile communication network.

The terminals 2, 6, 12 and 16 may be associated with an organisation whose employees may use their mobile stations in at least two networks, such as in  
25 two countries. In the following examples such organisation will be referenced to by the term 'company' or 'corporate'. However, the terms company or corporate shall be understood broadly as referring to any organisation or similar providing a number of users with mobile and other subscriptions. Such organisations include, without any intention to be limited to these, government  
30 bodies, international and national associations, the United Nations or various sub-organisations thereof, trade organisations and so on. Such organisations may also comprise a third party, such as a commercial service provider.

A connection can be established i.e. set-up via the third communication network 10 between the mobile station 12 connected to the network 11 and  
35 another party connected for example to the first mobile communication network 1. The networks 1 and 11 are typically connected via other means, or may

even interface each other via a gateway, see Figure 5. This connection between networks 1 and 11 is illustrated in Figure 4 by line 9. Line 9 shall be understood to denote all possible other connections between the two networks, such as the connection that would be provided as a default connection  
5 between the roaming mobile station 12 and the home network 1.

The other party may be another mobile station, e.g. the mobile station 2. The other party may also be any other type of terminal, such as the public switched telephone network (PSTN) terminal 6. The PSTN terminal 6 may be connected to network 1 by means of the PSTN and/or suitable gateway apparatus 7 or  
10 the like.

In certain embodiments, one of the terminals is a computer. The establishment of the connection then comprises establishing a data connection between the computer and the mobile terminal.

Each of the mobile communication networks 1, 11 may comprise various  
15 network elements such as base stations 3, 13, mobile switching centres (MSC) 5, 15 and associated registers such as home location registers (HLR) and visited location registers (VLR). The same applies also for the network 100 of Figure 1. It shall be appreciated that although not shown in Figures, a mobile telecommunication network typically comprises further network entities such as  
20 base station controllers and/or radio network controllers, support nodes, gateways and so on. The skilled person is familiar with the required elements of a mobile telecommunication network, and therefore these elements are not discussed in more detail herein. As these elements do not form an essential part of the invention they are omitted from Figures for clarity.

25 The third communication network 10 may be operated independently from networks 1 and 11 such that charges for connections over the third communications network 10 (if any) are not charged in accordance with the normal charging schemes of the operators of networks 1 and 11.

The third communication network 10 may employ packet switching for data  
30 communication. In Figures 4 and 5 the third communication network 10 is provided by an IP (Internet Protocol) based packet data communication network. The packet data communication network may be an internal data communication network of the company (e.g. an intranet of the company).

The IP based system 10 may be adapted to provide the so called Voice over  
35 IP (VoIP) backbone for the company. The skilled person is familiar with the

concepts of IP based communication networks and VoIP backbones, and therefore these are not explained in any greater detail. It is sufficient to note that the IP is a packet switching protocol that is widely used for the inter-organisational data communication networks. The VoIP backbone can be used  
5 for establishing voice calls between terminals connected to the IP system 10.

A routing server (RS) 20 is also shown. The routing server 20 may be connected to the communication system for example via the communication network 10 or otherwise. The routing server 20 is configured to provide location dependent routing information to the terminals in the communication  
10 system. The routing server 20 is configured to store routing information in appropriate storage means thereof, i.e. the data storage 102 for storing location dependent routing information of terminals and of individual subjects associated with the communication system. In an embodiment the routing server 20 stores various sets of routing information, for example a set for home  
15 network usage and a set for roaming usage. The routing information server 20 may store a plurality of sets of routing information, each set being associated with a certain location, such as a certain visited network.

The routing server 20 may provide information to terminals by pushing, i.e. by sending information without any request from the terminal. The routing server  
20 20 may be configured to automatically provide the roaming mobile station 12 with appropriate routing information in response to a predefined event. For example, a message information that the mobile station is visiting network 11 may trigger the transmission.

The routing server 20 may also be adapted to transmit routing information to a  
25 terminal inquiring for the routing information. For example, routing information may be provided to a terminal which is about to start set-up of a connection over the communication system. The terminal inquiring for the routing information may be the mobile station calling to another terminal connected to the communication system. Alternatively, the terminal inquiring for the routing  
30 information may be any terminal calling to a mobile station connected to the communication system.

The routing server 20 may be able to communicate directly with terminals connected to any of the networks as well as with any entity of the communication system. The routing server 20 may also be adapted to receive  
35 location information of the terminals. According to an embodiment the mobile

station 12 may inform the location thereof to the routing server 20 for example when entering in the coverage of the communication network 11.

5 The routing server 20 may also contain a specific set of routing information, for example a so called corporate directory phonebook and related user information that may be communicated to the terminals, with or without a request. The server may have capabilities to automatically update contact information in the terminal, provide automatic backup for contacts entered by the user manually and to automatically recognise and resolve synonymous names in the contact information.

10 The routing server 20 may receive location information any time when a terminal, such as the mobile station 12, enters a network or a location area, i.e. when the location of a terminal in the communication system changes. Examples of such situations may be when the roaming situation of a mobile station is recognised or when a terminal is switched on. In such a situation, the  
15 terminal may send a message preferably automatically to the routing server. The routing server may also receive location information at regular, predetermined intervals.

It shall be appreciated that the routing server does not need to be a separated entity. Instead, the functionality thereof may be provided by any appropriate  
20 network entity, such as an access point (AP) entity 4 of Figures 4 and 5 as will be explained below.

In certain embodiments, the routing server functionality may be implemented in a SIP (session initiation protocol) server or a SIP proxy server. The routing server may thus become a part of the session initiation protocol.

25 As mentioned above, the mobile station comprises input means for input of location dependent routing information, such as routing information from the routing server 20. The input means may be comprised in the processing means 308.

The mobile terminal also comprises memory means 310. In the present  
30 embodiment, the memory means 310 are adapted to store routing information received from the routing server 20. When a terminal requires routing information, an appropriate set of routing information or a part thereof may be provided to the terminal. An appropriate set of routing information may also be provided to a terminal automatically when the terminal provides the routing  
35 server 20 with information about its location, for example.

The routing information may be provided for the mobile station from the routing server 20 also via another means than via any of the shown communication networks. For example, the mobile station may connect itself to the routing server 20 for download of routing information via an appropriate local connection, such as short range wireless link or cable. The routing information may also be transferred to and/or stored in the mobile station by means of the memory means 310, such as an appropriate memory card.

In accordance with an embodiment the routing information stored in the memory means 310 of the mobile station may be updated based on routing information received from the routing server 20.

In accordance with an embodiment, in a roaming situation, the mobile station 12 may receive from the routing server 20 an indication of an action to be taken consistently with all the routing information comprised in the memory means 310. As an example, this action may be adding the number of the local access point, for example the AP 14 of Figure 4, in the beginning of each number in the dialling list stored in the memory means of the mobile station, as will be explained below. It is also possible that the mobile station receives the all or part of the desired dialling list or set of routing information from the routing server and overwrites the previous dialling list or set of routing information with the new dialling list or set of routing information. Several other possibilities may be used.

Certain embodiments are now described in connection with Figures 6-8 illustrating alternative or complementary embodiments. A system may include a plurality of the functions described herein or only one or two of them.

A reference will now be made to the flowchart of Figure 6 illustrating operational steps in accordance with an embodiment. In step 600, a plurality of sets of routing information are stored in a memory means of the mobile terminal. When the mobile terminal enters to a network, the set of routing information associated with the network is selected from the sets of routing information at step 602. A connection may then be set-up between the mobile terminal and another terminal by means of the selected routing information at step 604.

Figure 7 shows a further embodiment. In step 700 routing information is stored in a routing server. Routing information may then be provided from the routing server to a mobile terminal at step 702. The routing information is received by the mobile terminal and stored in memory means of the mobile terminal at step

704. When the user of the mobile terminal wants to set-up a connection with another terminal, appropriate routing information is selected from the memory means based on the location of the mobile terminal at step 706. A connection may then be set-up between the mobile terminal and another terminal by means of the selected routing information at step 708.

In accordance with a further embodiment illustrated in Figure 8, the routing server 20 is configured to modify routing information stored in the database thereof based on location information associated with the location of a particular mobile station. The location information may be received for example from the mobile terminals, from company specific access points or from the operator of the home or visited network. In this regard a reference can be made to the flowchart of Figure 8 illustrating this exemplifying embodiment.

In step 800, location information of a mobile station entering to a new location, such as a visited network, is provided to a routing server. Routing information stored in the routing server is modified based on the new location of the mobile station in step 802. This modification may comprise updating the routing information relating to the mobile station and/or selecting an appropriate set of routing information to be transmitted to the mobile station. Routing information is then transmitted from the routing server to a terminal in step 804. The terminal may then use the information for initiating the set-up of a connection in step 806. The initiation of the set-up may occur immediately upon receipt of the routing information, or the routing information may be stored in the terminal and used later on for the connection set-up.

In a typical use case the location of mobile stations served by the routing server needs to be known on country level. There are various mechanisms how this can be supported. Some examples are given below.

A routing information client sends automatically a short message to a service number associated with the routing server, or with another entity storing the location dependent information in the data storage, when the client recognises a roaming mobile station. In the following, routing server is used to denote the entity storing the location dependent information in the data storage. However, it shall be appreciated that the entity may be any other appropriate network entity, certain examples of which are given in this description. The client can recognise roaming e.g. based on changed operator identity. The identity information may be included in the short message. When the routing server

receives the short message, it updates the location information in the data storage based on the identity information.

The mobile station 12 comprises processing means 308 as mentioned above. The processing means may participate in a process for informing the location  
5 of the mobile station to the routing server.

Location information of an employee may also be retrieved from operator's network by making inquiry based on the MSISDN of the mobile station. The routing server may check if the location of the terminal has changed and thus update the routing information, if needed. The checking can be made from the  
10 operator of the home network of the terminal. The checking can be made at regular, predetermined intervals or whenever desired and the checking may be automatic or manual.

Another possibility is to perform an explicit location registration, for example when a roaming employee makes the first phone call through the system. The  
15 system updates the location information based on the route through which the call is routed into the corporate IP network, i.e. through which gateway the call comes in. In certain embodiments, an explicit location registration may be done when for example a roaming mobile station establishes the first connection from the visited network through the corporate communication network 10 with  
20 the aid of the routing server. The routing server may then update the location information based on the route through which the call is routed into the corporate communication network 10, such as through which gateway the call comes into the corporate communication network 10.

The routing server may also receive routing information for an individual  
25 connected to a terminal in the communication networks. These terminals may include any terminal connected to the communication system to which a user of a mobile station might wish to establish a connection. These terminals may be located in any network comprised in the communication system. For example, if the location of an individual, such as the office of the individual,  
30 changes so that the contact information also changes, the routing information in the routing server may be changed. The routing server may receive routing information directly from the individual, for example by means of a registration message. The routing server may receive routing information also from another party, such as a register administrator or the like.

35 Referring back to Figure 4, in accordance with an embodiment, a company responsible for the costs for calls from and to terminals 2, 6, 12 and/or 16 may



have set up at least one network-based access point (AP) entity 4, 14. The AP entities may be provided in association with the home network 1 and in at least one foreign country. In Figure 4 the latter is provided in association with the visited network 11. The AP entities may provide the terminals 2, 6, 12 and 16  
5 connected to the respective networks with access points so that the terminals may have connections over the third communication network 10. The AP entities 4, 14 are able to communicate via the IP system 10 of the company employing the users of mobile stations 2 and 12. It shall be appreciated that the users of mobile stations or other terminals need not to be employees of the  
10 company operating the communication network 10. This definition is given for illustrative purposes only. Furthermore, the users of terminals need not to subscribe the same network.

An AP entity may be provided by means of a server or similar data processing entity. The AP server may be located at any location wherein it has access to  
15 the network 10. Thus it may be located at the premises of the company itself, at the premises of the operator of the respective communication network or even at the premises of a third party service provider. In Figure 4 embodiment the AP servers 4, 14 are provided with communication means enabling VoIP, communication with each other over the IP network 10. The AP servers 4, 14  
20 are also shown to be connected to the respective mobile networks 1, 11. The AP server 4 is also shown to be connected to the fixed PSTN network. It shall be appreciated that the AP servers 4, 14 may be connected, depending on the application, to any entity of the networks involved in provision of connections to the subscribers, such as to local MSC 5, PSTN 7, intelligent network (IN)  
25 entities (not shown) and so on. In certain embodiments, the PSTN gateway functionality may be integrated into an AP.

The AP entities 4, 14 shown in Figure 4 are only an example of possible access points. Possible access point implementations may also comprise mobile virtual private network (VPN) media gateway or other VoIP boxes with  
30 break-in and/or break-out capabilities, calling card access number or a tailor-made access point with wide range of options. The implementation depends on various aspects. Most elaborate solutions may be needed in optimising calls received in a roaming situation or relating to voice dialling.

In some networks an automatic two-stage dialling may be needed. In two-  
35 stage dialling a number of an AP entity or of a similar element is added in the front of the telephone number of the terminal. Typically, the number of the AP is separated from the actual telephone number of the terminal by a pause "p".

In such cases, telephone numbers to be dialled are different in different networks depending on the location of the calling party compared to the called party and the home network when a connection is to be established. In order to get the advantage of the two-stage dialling irrespective of the location, different  
5 alternative number combinations need to be available or easy to formulate so that the correct number combination can be readily retrieved in every location.

The mobile station or the routing server may take care of the managing and creation of such number combinations. The mobile station or the routing server may create network-specific set of routing information, so-called sub-  
10 list, of a larger data storage, so-called contact database. Such a sub-list may comprise the AP number plus the actual contact number stored in the contact database. For example, when a Finn goes to Germany, the routing server can provide the Finnish country-specific list with the local German AP for that particular visiting user when the user is registered with the local AP. A general  
15 set of routing information or a network-specific set of routing information may be shared by a plurality of users. The contact database may be stored in the memory means of the mobile terminal or in the routing server.

According to an embodiment, multiple databases may be avoided. Routing information may be dynamically applied to a selected contact database entry  
20 comprised in the master set of routing information during each call set-up. In such a case, the selected database entry is converted to an actual number to be dialled by the terminal using location dependent routing information stored in the data storage. Such converting may comprise, for example adding the AP number in the front of the number stored in the contact database. The AP  
25 number is thus in this case the location dependent routing information.

In certain cases, the contact information of a certain terminal is not included in the set of routing information. In such a case, the address of the other terminal, such as the telephone number, is inputted in the calling terminal. The calling terminal then performs an action, such as converting the dialled number,  
30 based on the location dependent routing information.

The embodiments enable use of name-based dialling when the mobile station is abroad, or otherwise roaming, as well as in the home network. The routing server comprising a contact database may be used to in provision of data to roaming users such that a name may always be linked with desired, updated  
35 routing information. The number linked with the name may be updated in the routing server in an appropriate manner, for example in relation to a

registration process as described in the following or then a roaming mobile station may select the appropriate routing information among information send from the roaming server.

5 The name-based dialling system routes the call from the roaming mobile station in accordance with a name selected from a list stored in the mobile station, spoken to the mobile station or otherwise input into the mobile station. The user of the roaming station may access the system by dialling a short access number, e.g. '444', regardless the country the roaming user is in at the very moment. Having such a number for a company e.g. all over the Europe in  
10 each country, a corporate traveller can call any of his/her colleagues just by giving the full name of the called party. The location and thus the routing information of the called party may then be retrieved from the contact database. Having a replica of user's personal dialling list on the routing server, the roaming user is enabled to call via the service any of the names appearing  
15 in the user's personal contact list.

Retrieval of the updated personal contact list from the routing server provides several advantages. Even though the mobile station may already have a list of contact details as well as the number for the roaming AP, the mobile station may, although their capabilities grow all the time, be capable of storing nothing  
20 more than a limited list. For a large company the list of employees and their contact information may be substantially large and, more importantly, the list may change regularly, even daily. It may thus be advantageous to be able to store this information on the network side.

In the following some examples of establishing a connection between terminals  
25 over the communication system are described with reference to Figures 4 and 5, where appropriate.

When the user of the mobile station 12 arrives to a visited network, for example a foreign country, the mobile station 12 may register into the local operator's network 11 in a state-of-the-art manner. The registration process  
30 may be handled by the mobile switching centre and visitor location register (MSC/VLR) 15. As the registration process as such is well defined by appropriate mobile telecommunication standards, it will not be discussed in here in more detail. It is sufficient to note that the registration may be required e.g. for the purposes of providing required call routing and charging  
35 information.

In addition, the mobile station 12 may be adapted to register into the local AP 14 of the company. The local AP is associated with the visited network 11, and may thus also be referenced to as visited AP.

5 In the following detailed description of an example, the registration process is described referring to the AP. The AP informs the routing server 20 of the location of the registered mobile station. However, the information relating to the location of the mobile station may also be provided directly with the routing server, for example such that the home network of the mobile station directly informs the routing server on reception new location information from the  
10 visited network.

In order to improve user friendliness of the system as well as to ensure that all roaming users indeed register into the routing server and/or the local AP, it is advantageous if the registration process is automatic so that it occurs seamlessly and transparently from the user.

15 The location information message itself may include an indication that the mobile station has entered an area where it needs to register into the local AP.

The automatic registration process may be initiated, for example, such that the terminal sends automatically a message in response to detection that registration to AP and/or routing server is required. The message may be, for  
20 example a short text message, a multimedia message, an email message or the like. When the AP receives the message, it may update the terminal location information, for example based on the operator identity included in the message. The AP may also forward the information relating to the location of the mobile station to the routing server.

25 Alternatively, the registration process may be made by an automatic phone call to the local AP or by any other automatic transaction appropriate for this purpose. Instead of automatic registration, the user of the mobile station 11 may simply request for registration in the AP 14 e.g. by selecting an appropriate option from the menu of the mobile station, by pressing a specific  
30 button or sending a request message (e.g. a short message service message) to the AP 14.

However, the automatic registration is preferred since the cost cutting may prove difficult to realize if the registration depends solely on the users. This might be especially the case if the users feel that they are forced to use clumsy  
35 approaches.

As mentioned above, the mobile station 12 may be provided with memory means for storing routing information associated with individual destinations in the communication networks. The mobile station 12 may be adapted to receive updated information either automatically or on a demand.

- 5 An appropriate sub-list of the contact database or another appropriate list, such as a list of APs may become available to the mobile station automatically, for example when the roaming situation is recognized in relation to the registration process. In the context of the registration process, the sub-list may be automatically selected by the mobile station based on the country or other  
10 specific location where the mobile station is roaming. The automatic selection may be initiated by the mobile station, by any appropriate entity of the network the mobile station is connected to or by an entity of the organisation.

The message from the routing server, the AP or the network may include information indicating if the operator is integrated with the company, whether  
15 the operator supports a corporate dialler functionality of the company and how the corporate dialler functionality may be accessed, a call-in number and other details about the nearest AP, details for two-stage call set-up approaches, authentication or authorization keys or details for the AP, recommended IDD code to be used instead of "+" and so on. Preferably, this information is sent in  
20 parametrized format.

The contacted visited AP or other network element may authenticate the mobile station in order to assure that the mobile station is allowed to receive routing information from the routing server or other information for example from the AP. The authentication may be carried out e.g. based on the phone  
25 number of the mobile station (e.g. the Mobile Subscriber International Integrated Services Digital Network number; MSISDN) or other unique identifier depending on the application. Depending e.g. on the required security level and the used applications the identification may be based e.g. on the International mobile subscriber identifier (IMSI), subscriber identity module  
30 (SIM) number, a unique identifier of the mobile device itself (e.g. IMEI; International Mobile Equipment Identity), and so on.

In some cases, the original calling line information may disappear. This may happen for example when the call comes from a public network to a corporate private network. Furthermore, the calling party may have denied sending the  
35 information relating the calling number. When the calling number cannot be received, the identification may be carried out for example based on the dual-

tone multi-frequency (DTMF) tones, through a speech recognition function responding to human voice or through a short message.

Calling party identification may be done through a caller identity inquiry procedure where the identification entity within the AP may generate a  
5 specified DTMF tone, for example '9', which is sent to the line as inbound signalling immediately after a call has been established to the AP. When the identification module in the terminal receives the tone it may send its own number information as a response to inquiry using DTMF tones. The  
10 identification entity may take the number, search the corresponding MSISDN from a register for example within the AP, and proceed with the call establishment procedure if the number was found from the register. Otherwise the call may be rejected and the identification entity may make 'Unauthorized Call Attempt' registration to the call log.

If the identification entity does not start to receive an answer to the inquiry  
15 within a period of time, for example 5 seconds (i.e. terminal of the calling party does not support the caller identity inquiry), the call establishment may proceed but the identification entity may make 'No Number' registration to the call log.

Calling party identification inquiry using DTMF tone may also be initiated by the  
20 receiver of the call, either manually or automatically through software, whenever the calling party identity is not otherwise received. In this embodiment, a call connection needs to be established for the duration of the inquiry.

Another alternative for the caller identity inquiry may be to utilize speech  
25 recognition technology. The AP may provide speech recognition capability through which the calling line identity information can be requested from the end-user. When the AP receives a call without proper calling line identification the identification entity within the corporate access point may generate the request with human voice e.g. '*Please say your name*' to the line after which  
30 the user must say his/her name e.g. '*Jukka Nikander*'. The identification entity may then transform the user's name e.g. as LDAP CN (Lightweight Directory Access Protocol Common Name) and proceed as described above.

Request the name of the user with human voice may in certain embodiments be the preferred way to get the needed identification information. However, it  
35 requires basic Interactive Voice Response (IVR) functionality from the system. In certain embodiments, the information may be requested using a DTMF tone.

The identification entity could give a DTMF tone, any tone, after which the user may say his/her name.

5 The implementation of the registration function may require modifications to the software part of the mobile station. It shall be appreciated that the next generation mobile stations, such as the Symbian™ based mobile devices are coming to the market, and that these devices are adapted to enable easy implementation of simple device-based applications. Thus the required functionalities of the mobile station may also be implemented as a non-proprietary solution (e.g. as an add-on software).

10 After a successful authentication, i.e. the mobile station 12 is satisfactory being identified as being a corporate user or otherwise allowed user e.g. based on the Mobile Subscriber International Integrated Services Digital Network (MSISDN), IMSI, SIM, or IMEI codes thereof, the DTMF tone or using a speech recognition function, the foreign AP 14 informs the routing server 20  
15 and/or the home AP 4 of the registration of the roaming mobile station 12. After the routing server 20 has received notification from the visited AP 14 that the mobile station 12 is roaming within the specified network, the routing server 20 may modify routing information in the routing server, advantageously in the contact database. The routing server may then provide updated information  
20 with another terminal or to transmit an appropriate dialling sub-list to the mobile station 12.

The home AP 4 may also use the updated routing information for routing any calls to the mobile station 12 via the IP system 10. In some cases, the routing server may provide routing information for example to the home location  
25 register if the call is to be routed without the aid of APs. The routing server 20 connected to the communication system has received information relating to the location of the mobile station 12 when the roaming situation was recognized and the mobile station 12 registered with the visited AP 14 and/or the visited network 11. The routing server 20 has modified the routing  
30 information in the contact database.

Some applications may require communication of other information between the routing server, the connection management entities, the terminals and/or other network entities. For example, information such as roaming mobile subscriber numbers or other temporary numbers may need to be signalled  
35 between the respective connection management entities and appropriate network entities of the home and/or visited networks (for example, the HLR of

the subscriber and/or the visited location register of the roamed network). The number for voice mail service centre and the number for short message service centre may need to be changed.

5 Users can maintain the personal dialling list in the routing server via e.g. a web interface. The personal dialling list may be accessed in various ways. Some of them have been discussed above. Also voice dialling may be used, where the routing server transmits the desired routing information to the mobile station and the mobile station acts automatically. All the user needs to do is to speak the called party's name to the routing server. It is also possible that the  
10 personal contacts are stored for speaker-dependent name dialling, i.e. the user trains speech samples for the desired names on the personal contact list. However, a web-based interface for defining personal contacts in written form and then using speaker-independent name recognition is believed to be a more efficient and user-friendly approach. The network based storage of  
15 personal dialling lists may enable storage of more names than what could be stored in the mobile station itself. Also different types of lists may be stored.

The roaming users may be provided with a speech-enabled dialling mechanism that is similar to that they are used to in their home country. Furthermore, a speech-enabled dialling scheme provides ease-of-use,  
20 naturalness and enhanced safety for the user. This may be especially advantageous for users who are doing some other tasks, such as driving a car or being otherwise engaged with other tasks.

The routing server can be hosted by the company itself. Thus no telephone system operator needs to be involved. Instead, a VoIP connection over the IP  
25 system 10 can be used for the data transportation. If the routing server is implemented by the company, it is up to it how the routing server is utilised further, and no involvement of the local operators is needed. However, it is possible that routing server platforms are provided by operators or third parties who can then sell further the service.

30 Some of the embodiments are described above in the context of a third network. It shall be appreciated that the third network 10 is not necessary for the implementation of the invention. For example, the communication may be routed via only two networks in an optimised manner based on the location of the mobile station. The optimisation may be based on various factors, such as  
35 the price, quality, capacity and reliability of the communication paths on offer.



In some of the above embodiments the third network 10 has been identified as an IP based communication system (VoIP). However, it shall be appreciated that the third communication network 10 or any further communication network can be any network capable of transferring communication between the terminals. For example, any packet switched network such as a frame relay network or asynchronous transfer mode (ATM) network or alike could be used. The communication could then be communicated e.g. as Voice over frame relay or Voice over ATM. The third network 10 can be the communication network of the company or leased from an operator or provided by a third party. The mobile telecommunications systems the user subscribe to can be any mobile system.

It shall also be appreciated that although the roaming uses a mobile station for the connection, the other party may subscribe to any type of network. The home access point to the system may be associated with any type of communication network, such as a PSTN, a local area network (LAN) and so on.

For the sake of simplicity some of the embodiments were described above in relation to a corporate case. It shall be appreciated that the invention is applicable in the context of any mobile user.

A single routing server can also serve many organizations. Updating of the routing information can be arranged so that from the corporate side, the updating is carried out by the corporate. The routing server modifies routing information based on the registration information it receives from the roaming mobile stations.

It is also noted herein that while the above describes exemplifying embodiments of the invention, there are several variations and modifications which may be made to the disclosed solution without departing from the scope of the present invention as defined in the appended claims. The embodiments described above relate mainly to call connections. However, the same concept using the data storage may be used in routing short messages, electronic mail or the like.

**CLAIMS**

1. A method for providing routing information for establishing connections over a communication system comprising a plurality of communication networks, the method comprising:
  - 5 storing location dependent routing information in a data storage;  
providing a terminal with location dependent routing information stored in the data storage; and  
establishing connection between the terminal and at least one other terminal using location dependent routing information provided by the data storage, wherein at least one of the terminals is a mobile terminal and  
10 information for routing the connection between the terminals is selected based on the location of the at least one mobile terminal.
2. A method as claimed in claim 1, wherein the step of establishing the connection comprises initiating the connection establishment by the at least  
15 one mobile terminal.
3. A method as claimed in claim 1, wherein the step of establishing the connection comprises initiating the connection establishment by a terminal other than the at least one mobile terminal.
4. A method as claimed in claim 1 or 2, comprising the further steps of  
20 storing at least two sets of location dependent routing information in the mobile terminal, and selecting information from one of the sets of routing information based on the location of the mobile terminal.
5. A method as claimed in claim 4, wherein the at least two sets of location dependent routing information comprise sets of routing information for use in  
25 the home network and in at least one visited network.
6. A method as claimed in claim 5, comprising the further step of receiving by the mobile terminal in a roaming situation the set of routing information relating to the visited network in which the mobile station is roaming.
7. A method as claimed in any preceding claim, wherein the cost of the  
30 connection is optimised by means of the location dependent routing information.
8. A method as claimed in any preceding claim, comprising the further steps of updating the location dependent routing information in response to an event.

9. A method as claimed in claim 8, wherein the update is triggered by one of the following: predetermined change in location of the mobile terminal, connection set-up by the mobile terminal, an request for update, receipt of information from a subscriber information database of the home network of the mobile terminal, change in the routing information associated with an individual mobile terminal, detection of wireless local are network, detection of personal area network, or change in presence status.
10. A method as claimed in any preceding claim, the step of establishing the connection comprising routing the connection via a first communication network serving the calling terminal, a second communication network serving the called terminal and a third communication network.
11. A method as claimed in claim 10, wherein the step of routing comprises routing the connection by means of an access point entity interfacing the third communication network with at least one of the first and second communication networks.
12. A method as claimed in claim 11, further comprising selecting the access point entity based on the location of the mobile station.
13. A method as claimed in any of claims 10 to 12, wherein the third communication network comprises a packet switched data network.
14. A method as claimed in claim 13, comprising communication of data network based on the Internet Protocol.
15. A method as claimed in any preceding claim, wherein the data storage is provided in a routing server, the step of providing a terminal with location dependent routing information comprising the step of transmitting the location dependent routing information to the terminal.
16. A method as claimed in claim 15, further comprising initiating a procedure for connection establishment by sending a voice command from the terminal to the routing server.
17. A method as claimed in any preceding claim, comprising determining the location of the mobile terminal based on an indicator received from the communication network serving the mobile terminal.

18. A method as claimed in any of claims 1 to 16, comprising determining the location of the mobile terminal based on information regarding the geographical location of the mobile terminal.
19. A method as claimed in any preceding claim, comprising computing at  
5 least one additional set of location dependent routing information based on location dependent routing information stored in the data storage and a master set of routing information.
20. A method as claimed in any preceding claim, comprising the steps of  
10 inputting in the terminal a telephone number of the other terminal, and routing the connection between the terminals based on the location dependent routing information.
21. A method as claimed in any preceding claim, wherein the calling terminal automatically uses location dependent routing information for establishing connections.
- 15 22. A method as claimed in any preceding claim, wherein one of the terminals is a computer, the step of establishing a connection comprising establishing a data connection between the at least one mobile terminal and the computer.
23. A computer program comprising program code means for performing  
20 any of the steps of claim 1 when the program is run on a computing means.
24. An arrangement in a communication system comprising a plurality of communication networks for providing a terminal with information for establishing a connection to at least one other terminal, the arrangement comprising:  
25 a data storage for storing location dependent routing information;  
means for transferring location dependent information from the data storage to the terminal; and  
in the terminal, means for establishing a connection between the  
terminal and at least one other terminal using location dependent routing  
30 information provided by the data storage, wherein at least one of the terminals is a mobile terminal and information for routing the connection between the terminals is selected based on the location of the at least one mobile terminal.

25. A mobile terminal enabled to communicate via a plurality of communication networks of a communication system, the mobile terminal comprising:

- 5       input means for input of location dependent routing information for use in establishing a connection over the communication system; and  
      connection establishment means for initiating establishment of a connection to another terminal based on the location dependent routing information.

10 26. A mobile terminal as claimed in claim 25, comprising processing means for processing information associated with the location of the mobile terminal and configured to select routing information for connection establishment based on the location thereof.

15 27. A mobile terminal as claimed in claim 25 or 26, comprising memory means for storing at least two sets of location dependent information, and being configured to select information from one of the sets of information based on the location of the mobile terminal.

28. A mobile terminal as claimed in any of claims 25 to 27, wherein the connection establishment means are configured to automatically use location dependent routing information if available.

20 29. A routing server configured to store location dependent routing information, to receive information of the location of a mobile station, to modify the location dependent routing information based on the location of the mobile station and to transmit location dependent routing information to terminals.

1/8

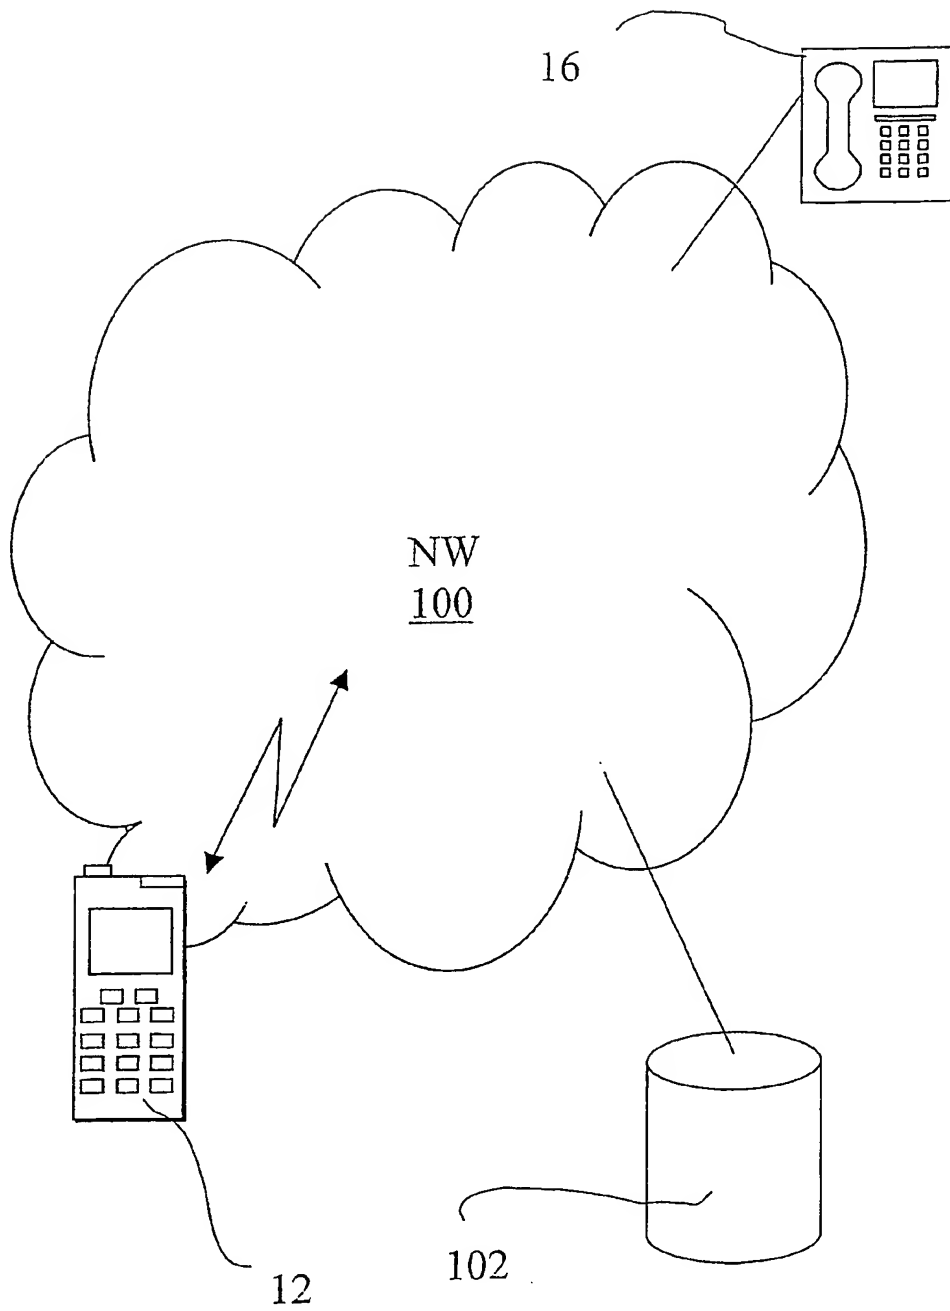


Fig. 1

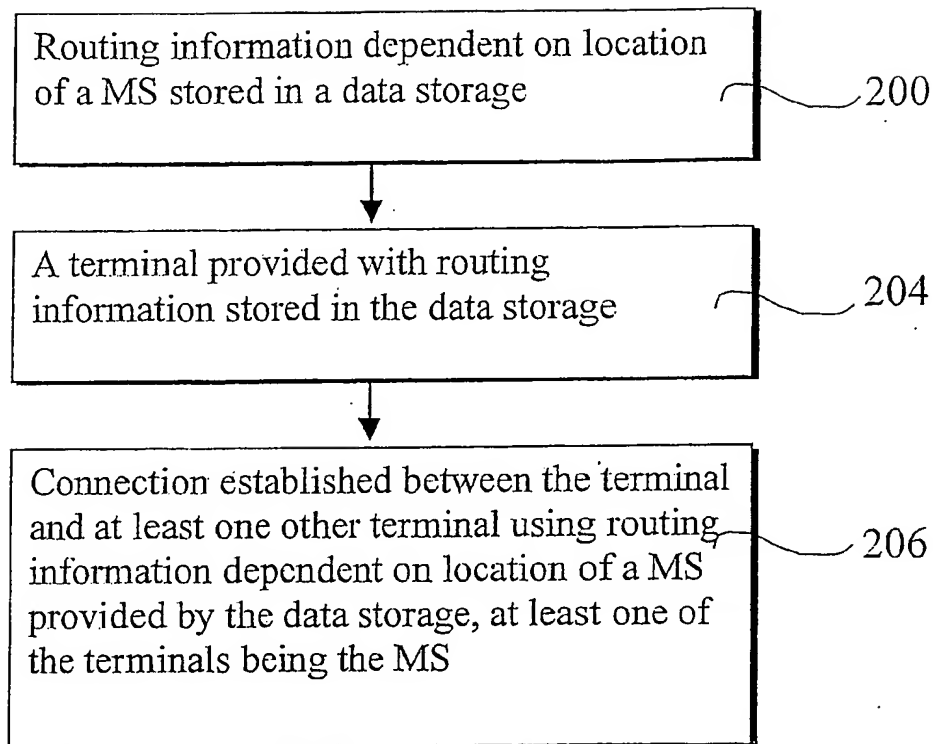


Fig. 2

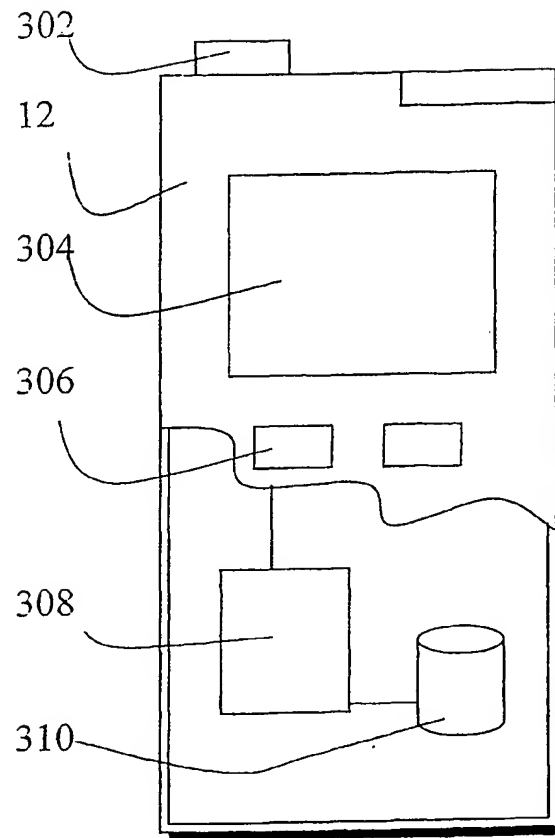


Fig.3



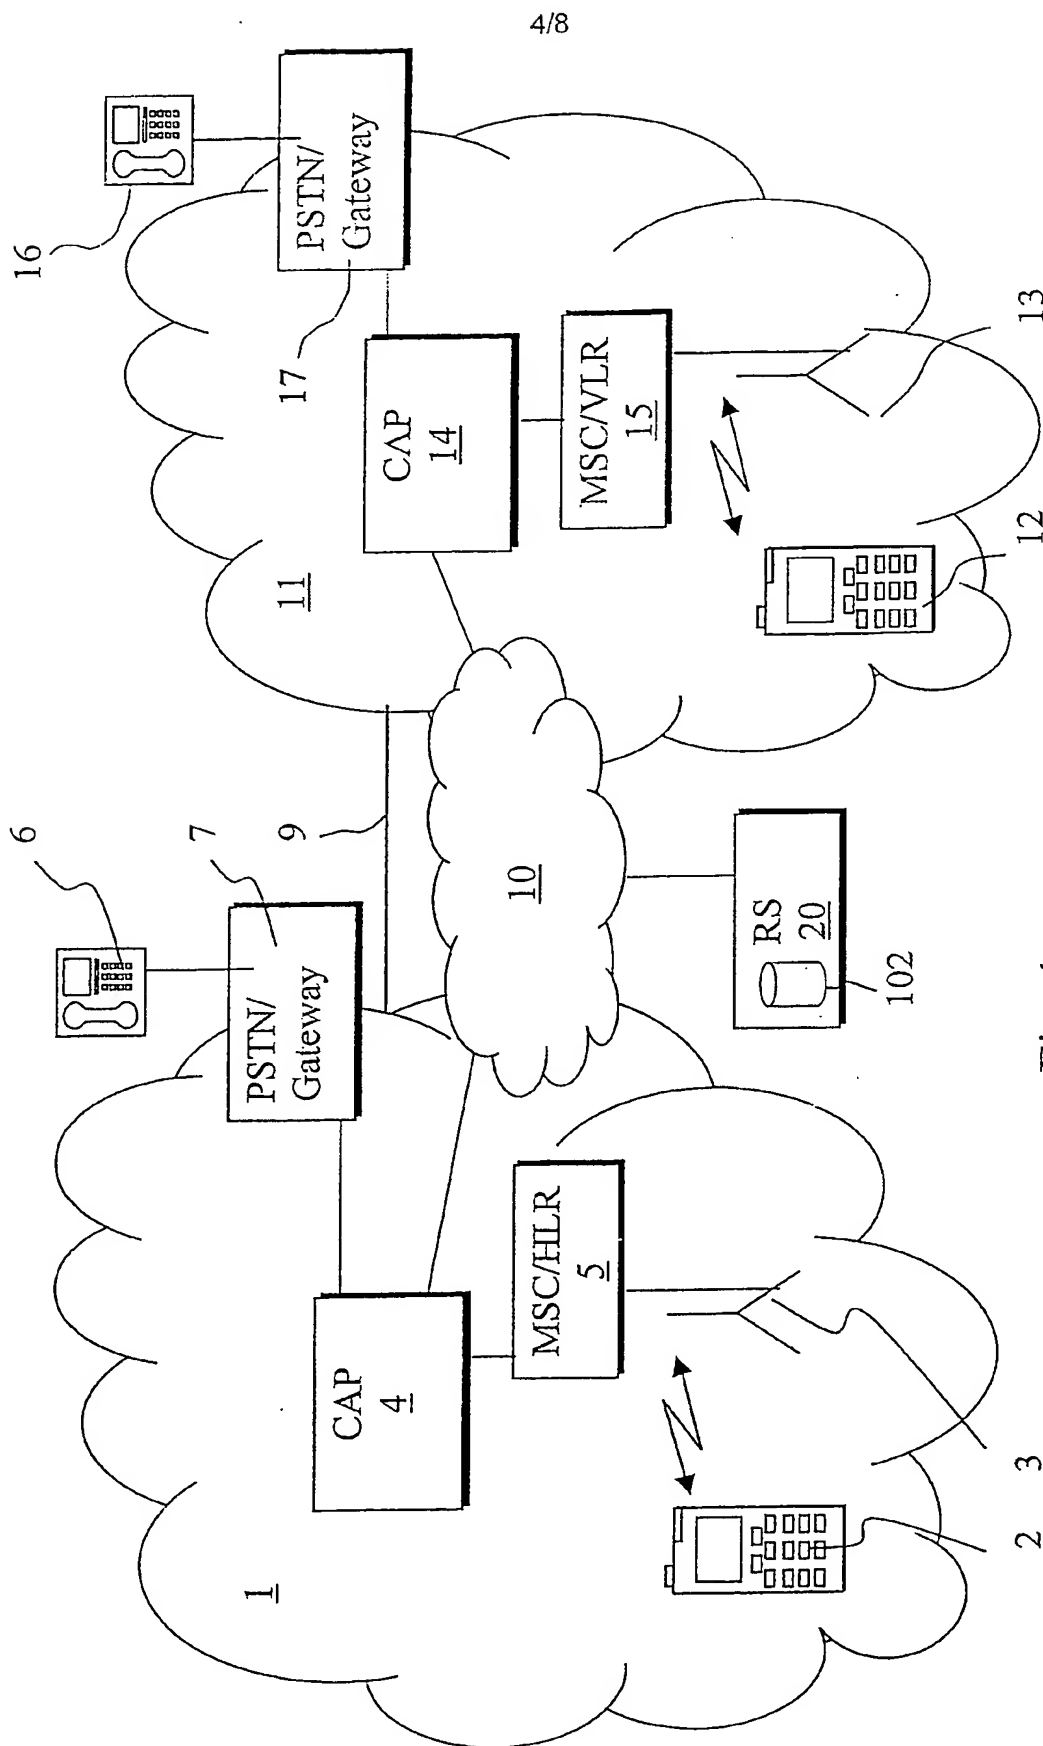


Fig. 4

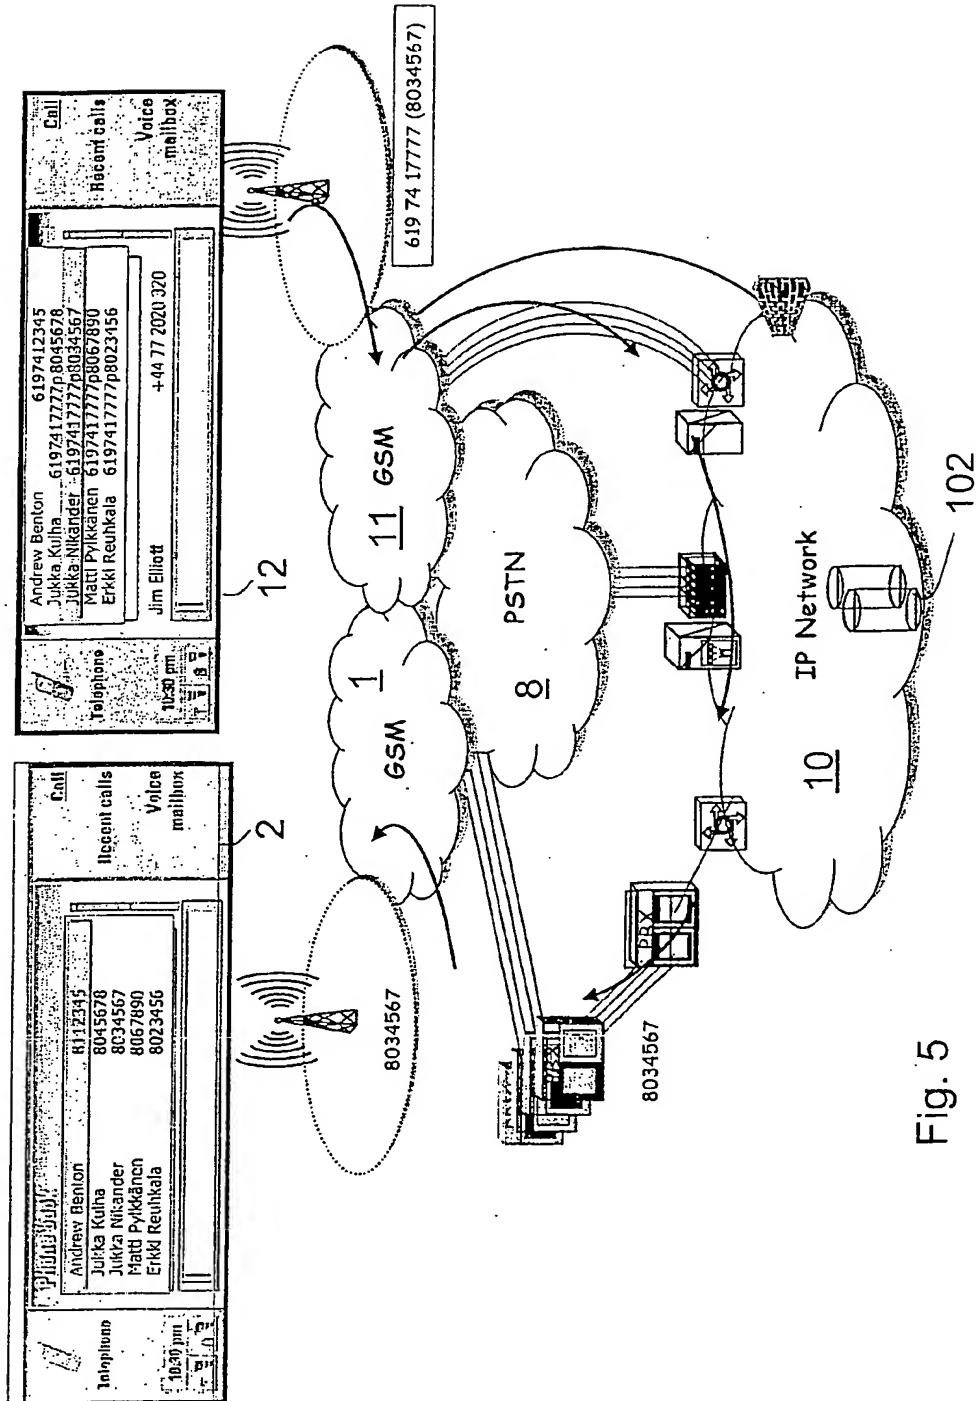


Fig. 5

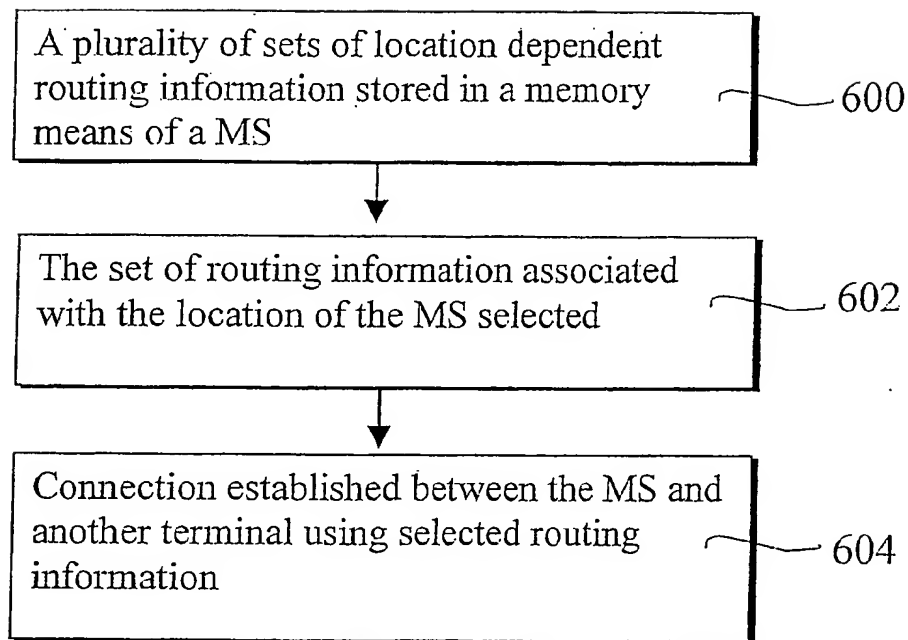


Fig. 6

7/8

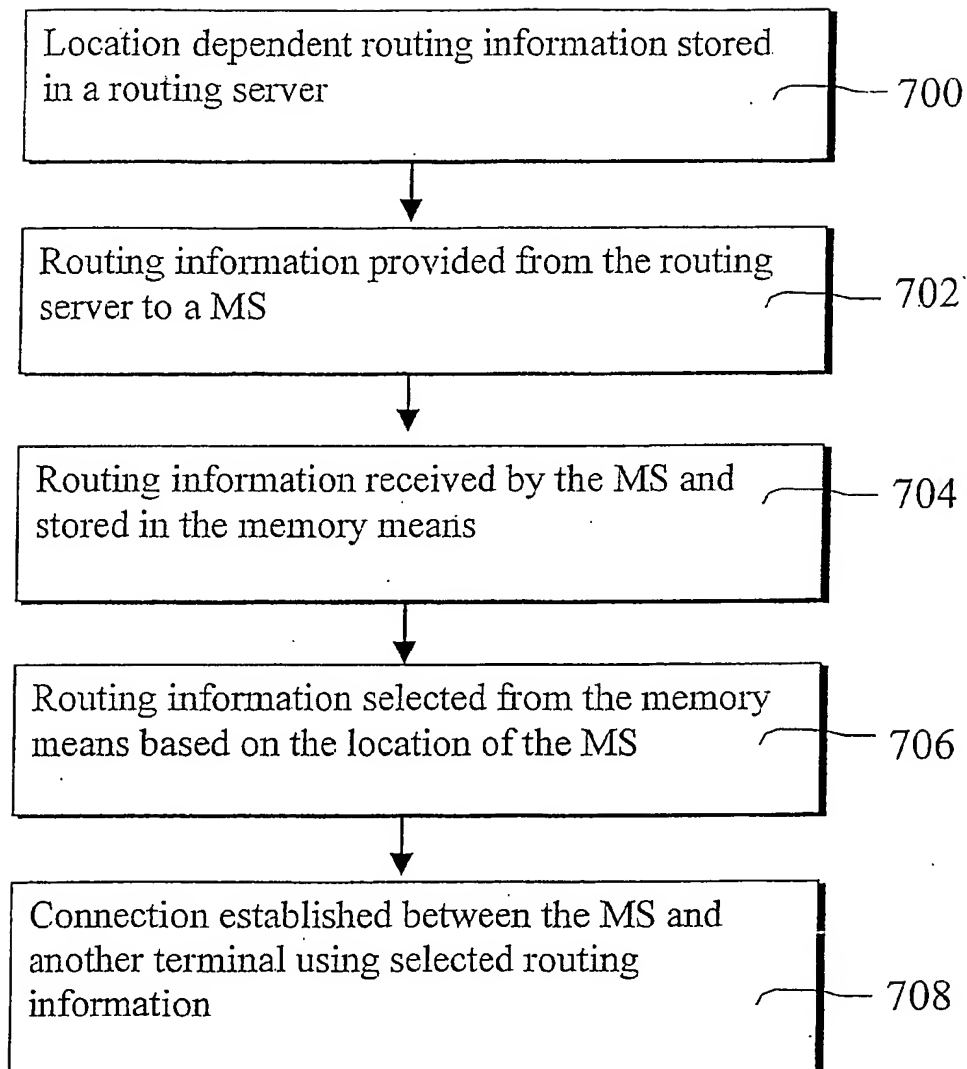


Fig. 7

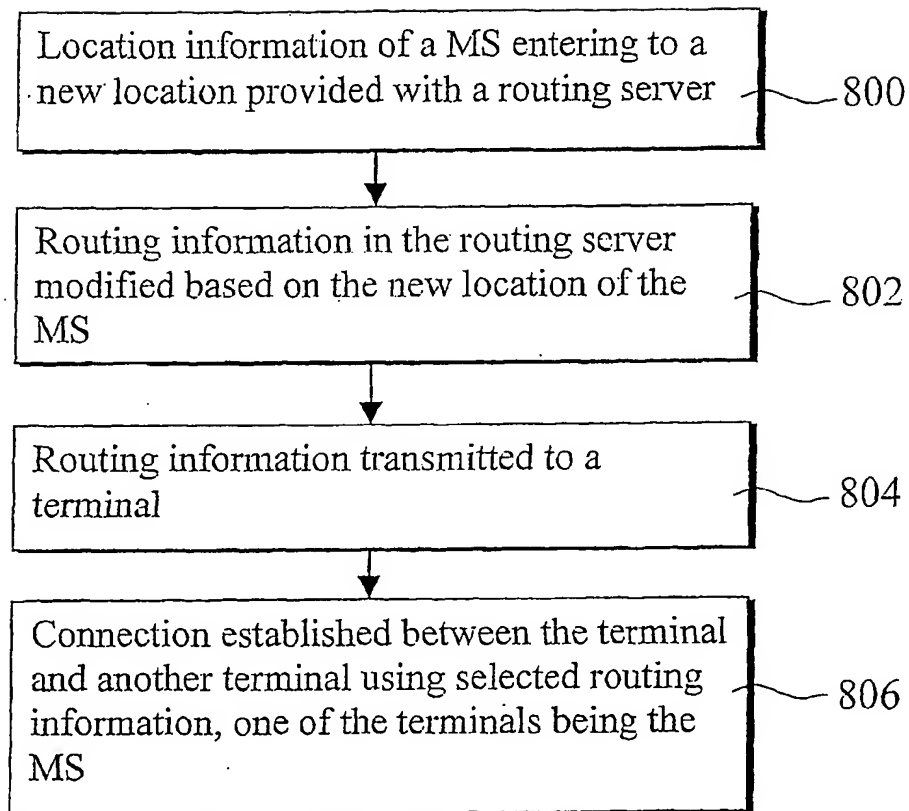


Fig. 8

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 2003/000816

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/38, H04L 12/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q, H04L, H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 0143395 A1 (NOKIA NETWORKS OY), 14 June 2001 (14.06.2001), page 2, line 1 - page 4, line 14, figure 2; the claims --	1-29
X	US 5400390 A (SALIN, H.P.), 21 March 1995 (21.03.1995), column 2, line 35 - column 3, line 16; column 5, line 11 - line 65, the claims --	1-29
X	US 6175622 B1 (CHINIWALA, S. ET AL), 16 January 2001 (16.01.2001), column 8, line 6 - column 9, line 37 --	1-29

☒ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 January 2004

Date of mailing of the international search report

03 -02- 2004

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Fredrik Blomqvist /OGU  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 2003/000816

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9213428 A1 (TELENOKIA OY), 6 August 1992 (06.08.1992), page 1, line 4 - page 4, line 15 --	1-29
A	WO 9956326 A2 (SIEMENS AKTIENGESSELLSCHAFT), 4 November 1999 (04.11.1999), page 9, line 1 - page 10, line 7 --	1-29
A	WO 0221768 A2 (REEFEDGE, INC.), 14 March 2002 (14.03.2002), page 6, line 26 - page 7, line 33 --	1-29
A	WO 0225985 A1 (GREAT HUMAN SOFTWARE CO., LTD.), 28 March 2002 (28.03.2002), page 3, line 27 - page 5, line 8 -- -----	1-29

INTERNATIONAL SEARCH REPORT  
Information on patent family members

24/12/2003

International application No.

PCT/FI 2003/000816

WO	0143395	A1	14/06/2001	AU	2281200	A	18/06/2001
				CN	1381125	T	20/11/2002
				EP	1238514	A	11/09/2002
				JP	2003516669	T	13/05/2003

US	5400390	A	21/03/1995	AT	144672	T	15/11/1996
				AU	651466	B	21/07/1994
				AU	1914192	A	08/01/1993
				DE	69214772	D,T	03/04/1997
				EP	0542963	A,B	26/05/1993
				SE	0542963	T3	
				FI	87963	B,C	30/11/1992
				FI	912737	D	00/00/0000
				HK	1007374	A	00/00/0000
				JP	3184526	B	09/07/2001
				JP	6500683	T	20/01/1994
				NO	305730	B	12/07/1999
				NO	930412	A	02/04/1993
				WO	9222174	A	10/12/1992

US	6175622	B1	16/01/2001	NONE
----	---------	----	------------	------

WO	9213428	A1	06/08/1992	AT	134813	T	15/03/1996
				AU	659814	B	01/06/1995
				AU	9047291	A	27/08/1992
				DE	69117502	D,T	10/10/1996
				EP	0520049	A,B	30/12/1992
				SE	0520049	T3	
				FI	90713	B,C	30/11/1993
				FI	910211	A	16/07/1992
				NO	306370	B	25/10/1999
				NO	923575	A	13/11/1992

WO	9956326	A2	04/11/1999	CN	1315122	T	26/09/2001
				DE	19819582	A	04/11/1999
				EP	1119994	A	01/08/2001

WO	0221768	A2	14/03/2002	AU	8679901	A	22/03/2002
				AU	8839401	A	22/03/2002
				CA	2419853	A	14/03/2002
				CA	2419865	A	14/03/2002
				EP	1340337	A	03/09/2003
				EP	1346540	A	24/09/2003
				US	2002032855	A	14/03/2002
				WO	0221803	A	14/03/2002

WO	0225985	A1	28/03/2002	AU	7463601	A	02/04/2002
				KR	2002022976	A	28/03/2002